


	A	B	C	D
symmetrical	25 - 60	10	25 - 60	max. 130
asymmetrical	25 - 80	10	25 - 80	max. 130
1/2 CIL	52	10	25 - 95	max. 110

Variantes · Models · Modèles · Modelle

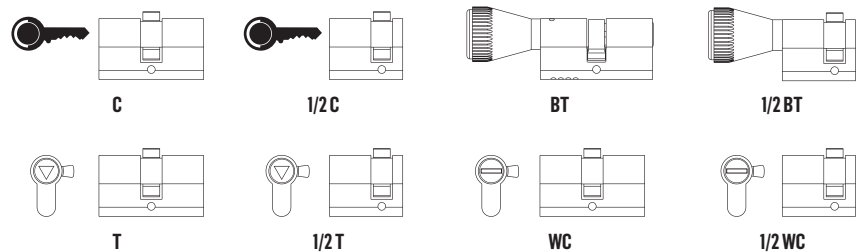

Opcional / Optional / Option / Optionen

- 6 pins**: 6 pins, 6 goupilles, 6 Stifte
- Anti-Perfuração / Anti-Drill / Anti-Perçage / Autohrschutz**: Anti-Perfuração, Anti-Drill, Anti-Perçage, Autohrschutz
- Anti-Pânico / Anti-Panic / Anti-Panique / Anti-Panik**: Anti-Pânico, Anti-Panic, Anti-Panique, Anti-Panik
- KA**: Chaves Iguais / Keyed Alike / Clés Identiques / gleichschließend

Características · Feature · Caractéristiques · Eigenschaften

- EU**: Cilindro perfil europeu / Europrofile cylinder / Dylindre profil européen / europäischer Profizylinder
- NORM DIN 18252**: Norma DIN 18252 (dimensional) / DIN 18252 norm (dimensional) / Norme DIN 18252 (dimensionnel) / entspr. DIN 18252
- 5 pins**: 5 pins, 5 goupilles, 5 Stifte
- 3x**: 3 chaves / 3 keys / 3 clés / 3 Schlüssel
- MK**: Chave Mestre / Master Key / Passe Général / Partiel / Masterkey
- CK**: Chave Central / Central Key / Ouverture Central / zentraler Schlüssel
- Palheta 30° / Cam 30° / Panneton 30° / 30° Schließnase**
- 1pc**: Embalagem de 1 peça / Packing - 1 piece per box / Carton par 1 pièce / 1 Einheit pro Karton
- KD 30.000**: 30.000 combinações de chave (KD) / 30.000 key combinations (KD) / 30.000 combinaisons de clé (KD) / 30.000 Schließungen (KD)

NORMA · STANDARD · NORME · NORM · EN1303



Testes realizados em nosso laboratório de fábrica
 Tests made in our factory lab
 Testes réalisés en notre laboratoire d'usine
 Im Marques-Labor geprüft und bestätigt